Product line

Tockky AcuVave LED A-Baffles

Composition	Poliester and PLY
Fire rating	Class A ASTM-E84
NRC	1.00 (FIN:thick 127mm(5″); hight 304mm(12″); length 4′, 6′ or 8′; Tested spacing between fins 30cm(12″)

Tockky AcuVave Panels

Composition	100% Poliester
Fire rating	Class A ASTM-E84
NRC	0.38-1.10 base on thickness 9mm(3/8″) to 46mm(1-13/16″)

Tockky IndiStrail Tackable Panel

Composition	70% Poliester; 30% Cork
Fire rating	Class B ASTM-E84
NRC	0.45 12mm(1/2″)

Noise Reduction Coefficient (NRC) 12mm (1/2″) IndiStrail Tackable Panel

Distance from the wall
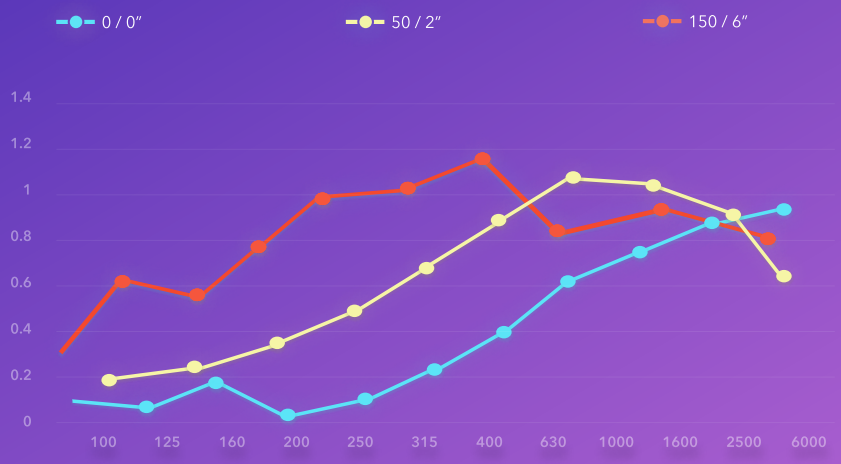
Frequency /Hz	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	a	NRC
0mm / 0″	0.03	0.01	0.09	0.04	0.05	0.09	0.12	0.25	0.32	0.49	0.61	0.72	0.82	0.85	0.91	0.94	0.95	0.44	0.45
50mm / 2″	0.20	0.16	0.22	0.32	0.46	0.56	0.63	0.80	0.89	1.03	1.04	0.99	1.07	1.00	0.93	0.97	0.92	0.81	0.80
150mm / 6″	0.29	0.46	0.44	0.57	0.68	0.81	0.97	0.96	0.91	1.04	0.92	0.80	0.94	0.94	0.91	0.90	0.91	0.97	0.90